



OPERATIONS AND MAINTENANCE SHOP BUILDING RESTROOM IMPROVEMENTS

Addendum No. 2 January 27, 2009

Date of Addendum Issue: January 27, 2009
Sealed Bids Due: Tuesday, February 10, 2009, 9:00 a.m.
Bid Opening: Tuesday, February 10, 2009, 10:00 a.m.

NOTICE TO ALL PLAN HOLDERS

This Addendum No. 2, containing the following revisions, additions, deletions, and/or clarifications, is hereby made a part of the Plans and Contract Provisions (Contract Documents) for the above-named project. Bidders shall take this Addendum into consideration when preparing and submitting their bids.

Bidders shall acknowledge receipt and acceptance of this Addendum No. 2 in the space provided on the Proposal/Construction Contract Form. Failure to provide written acknowledgement may result in disqualification of the Bidders submittal.

Addendum No.	Page/ Drawing	Location or Description of Change
--------------	------------------	-----------------------------------

PLAN NOTES

2.001	Page 8	Add the following language to the end of the page: Provide (5) dual communication receptacles in the new Office. The locations of the receptacles are to be approved by the Engineer. Provide dual home runs from each receptacle to the existing communication panel located in the closet off of the existing Mechanics Office. All components shall be UL listed for the intended use. Communication wires shall be category 5E conforming to ANSI/ NEC Standards.
-------	--------	--

PLANS


2.002	Drawing – 5 & 6 -	Refer to wall type “T” on drawing 6. Replace the note “600S137-33 Metal Studs @ 16” O.C.” With “800S137-33 Metal Studs @ 16” O.C.”.
-------	----------------------	---

QUESTION AND ANSWER

2.003	Plan Notes, Page -4-	Question: Is upsizing the waterline for the new water closet flush valves and relocated eye wash included in the bid. Answer: Yes. A 2” water line is provided to the mezzanine level mechanical room. Modify the existing plumbing as needed to service the fixtures in accordance with the Specifications.
2.004	Plan Notes, Page -4-	Question: Is insulating modified waterlines included in the bid? Answer: Yes. Repair and or provide new pipe insulation to match existing to the satisfaction of the Engineer.
2.005	Drawing 5	Question: It appears that the 6” wall size is not adequate to accommodate a water closet carrier. Answer: Provide commercial grade “Compact Water Closet Supports with Vertical Fittings”. This type of Carrier should fit within an 8” wall cavity (Refer to Addendum number 2.001). If all other dimensional requirements shown in the plans can be met the Contractor may elect to upsize the wall size to 10” to provide additional tolerance.
2.006	Drawing 5, Plan Notes Pages -7 & 8 -	Question: Will additional pull stations for the fire alarm system be required at locations that currently do not have them such as the Utilities Shop, Signs Shop, and Roads Shop? Answer: No additional pull stations will be required except as shown in the Plans.

End Addendum No. 2

Signed:

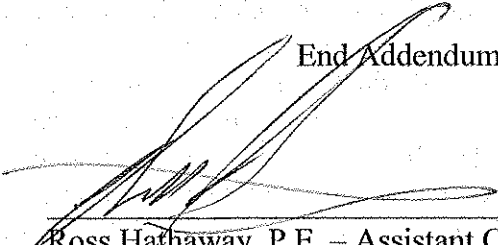

Ross Hathaway, P.E. – Assistant City Engineer