



NIKKEI MEMORIAL PHASE II
Addendum No. 6
January 27, 2009

Date of Addendum Issue: January 27, 2009
Sealed Bids Due: Thursday January 29, 2009 9:30 A.M.
Bid Opening: Thursday January 29, 2009 10:30 A.M.

NOTICE TO ALL PLAN HOLDERS

This Addendum No. 6, containing the following revisions, additions, deletions, and/or clarifications, is hereby made a part of the Plans and Contract Provisions (Contract Documents) for the above-named project. Bidders shall take this Addendum into consideration when preparing and submitting their bids.

Bidders shall acknowledge receipt and acceptance of this Addendum No. 6 in the space provided on the Proposal/Construction Contract Form. Failure to provide written acknowledgement may result in disqualification of the Bidders submittal.

Questions:


- 1) Drawing Detail 3/L2.5 – are the two flat top rockery steps at the back of the well house furnished by the owner as are the stone pavers at the doorway?
- 2) Drawing Detail 8/l4.5 – Where does this detail indicating 6” of base rock and 4” of top course over geotextile apply versus the 4” of gravel only over filter fabric as shown on Details 2/L4.4 and 1/L4.6?
- 3) What is the “soil fill” at Detail 2/L4.4 and what is the extent of the area it is to be applied?
- 4) Do the 2” x 12” x 12” concrete pavers have to be radiused?
- 5) Do we assume that all disturbed areas are to be hydroseeded?

Answers:

- 1) Flat top stone steps will be selected from the existing rockery stones on site.
- 2) Detail 1/L4.6 does reference the path aggregate detail 8/L4.5. Detail 2/L4.4 should reference detail 8/L4.5. The 4" applies to the depth of 1" cobble.
- 3) The soil fill is existing site soil. The extent of soil is to provide cover over the foundation and drainage materials and meet to existing grade.
- 4) The Pavers are placed to reflect the curve of the wall.
- 5) Disturbed areas are to be hydroseeded.

End Addendum No. 6

Signed:

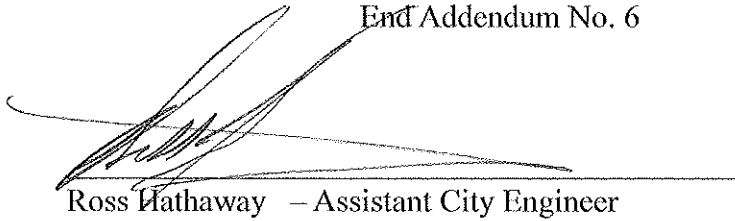

Ross Hathaway – Assistant City Engineer